

## THE SUREFIRE ONE YEAR GUARANTEE

We'll do what it takes to keep your SureFire gear running smoothly. SureFire warrants that if you—our customer—purchase this product and we determine that it is defective in material and/or workmanship with one year from date of purchase, we will repair or replace it—no hassle! Our warranty does not cover consumables or normal wear-and-tear, or damage resulting from abuse, alterations, unauthorized repairs, or use contrary to SureFire's user manuals.

## STANDARD DISCLAIMER

Except as specified above or prohibited by applicable law: all express or implied conditions and warranties, including, without limitation, any implied warranty or condition of merchantability or fitness for a particular purpose, or accuracy of any informational content, are hereby excluded and disclaimed by SureFire; and in no event will SureFire be liable for any special, direct, indirect, consequential, incidental or punitive damages howsoever arising and regardless of the theory of liability, even if advised of the possibility of such damages. Products, prices, availability, specifications, and offers are subject to change or cancellation at any time without notice.

## WARRANTY CLAIMS

For claims, contact Customer Service at 800-828-8809 or 714-545-9444 to obtain a Return Merchandise Authorization number (RMA#). Then package the unit carefully and send to (no CODs):

SureFire, LLC.  
Repairs Department, RMA# \_\_\_\_\_  
17680 Newhope, Suite B  
Fountain Valley, CA 92708

SureFire will pay reasonable shipping costs to return the unit to you.




18300 MT. BALDY CIRCLE  
FOUNTAIN VALLEY, CA 92708-6122  
SUREFIRE.COM

Revision C 1-2016  
71-01-984  
SIDEKICK-A



## SIDEKICK™

ULTRA-COMPACT TRIPLE-OUTPUT KEYCHAIN LIGHT  
SIDEKICK-A

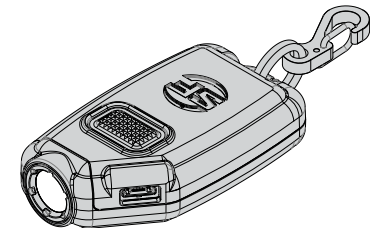

Specifications	SIDEKICK
<b>Output</b> (low / med / high)	5 / 60 / 300 lumens
<b>Intensity</b>	1,100 candela
<b>Runtime</b> (low / med / high)	45 / 4 / 1.25 hrs.
<b>Weight</b>	1.2 oz. (34 g)
<b>Length</b>	2.5 in. (6.35 cm)
<b>Bezel Diameter</b>	.58 in. (1.47 cm)

All measurements as per ANSI standard.

USER MANUAL

## SIDEKICK™

### WE BUILD THE BEST

This innovative SureFire illumination tool was designed, engineered, and manufactured in America—using the best components sourced worldwide—to provide you with a trouble free service and easy attachment to your keys. Please be sure to review this manual to ensure optimal performance.


### KIT CONTENTS

- Sidekick
- 6 inch Micro USB to USB cable
- Key ring
- Mini carabiner clip

### LIGHT OPERATION

Fully press activation button until light clicks on; this will provide constant-on output in the low setting. Click off and on again, within one second, for medium setting. Repeat for high-output setting. If Sidekick has been off for more than one second, it will default to its lowest setting on first click. See figure 1.


FIGURE 1

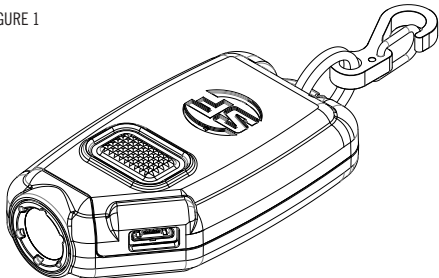

### RECHARGING

Insert the micro-USB end of the included cable into the port on Sidekick then insert the USB end into a wall (AC) or car (DC) using appropriate connector. The light will continuously flicker while connected to a power source to signal a proper connection. Full charge cycle may take up to 3 hours. The LED will constantly illuminate at the low output setting when fully charged. See figure 2.

FIGURE 2

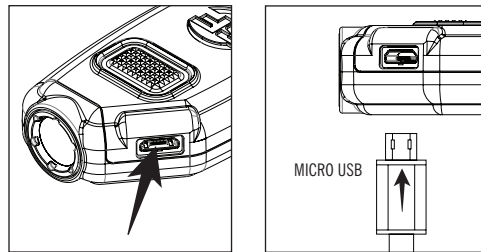

### MAINTENANCE

Use a clean, dry cloth to wipe off body and window.  
For additional tips on maintaining your SureFire illumination tool, visit [www.surefire.com/faqs-maintenance](http://www.surefire.com/faqs-maintenance).

### PROGRAMMING SIDEKICK'S ACTIVATION SEQUENCE

Sidekick's default activation sequence goes from low to medium to high output and then off; however, it can also be programmed by the user to reverse this sequence—high-med-low-off—to accommodate personal preference. **Sidekick must be plugged into its charger to program the activation sequence. Once programmed and removed from its charger, the activation sequence will not change unless Sidekick is reprogrammed to its default sequence.**

*To reverse Sidekick's default activation sequence*

1. Plug Sidekick into its charger
2. Press and release the pushbutton three times until high output is activated
3. Wait 5 or more seconds, then press pushbutton once more, turning Sidekick off
4. Remove Sidekick from its charger and test activation sequence—it should now be high-med-low-off


To restore Sidekick's activation sequence to its default setting (low-med-high-off), repeat the above procedure with the following exception in Step #2: **Press and release pushbutton three times until LOW output is activated.**

### ACCESSORIES

SureFire makes a full line of accessories for most of its illumination tools. For a complete listing, visit [www.surefire.com/parts-accessories](http://www.surefire.com/parts-accessories).



**LIGHTKEEPER™**  
Belt Clip Key Reel



**HEADBAND**  
V94 Adjustable Headband